


EFFICIENCY. EVOLVED. AGAIN.

14X™ HE HIGH EFFICIENCY TANDEM DRIVE AXLE

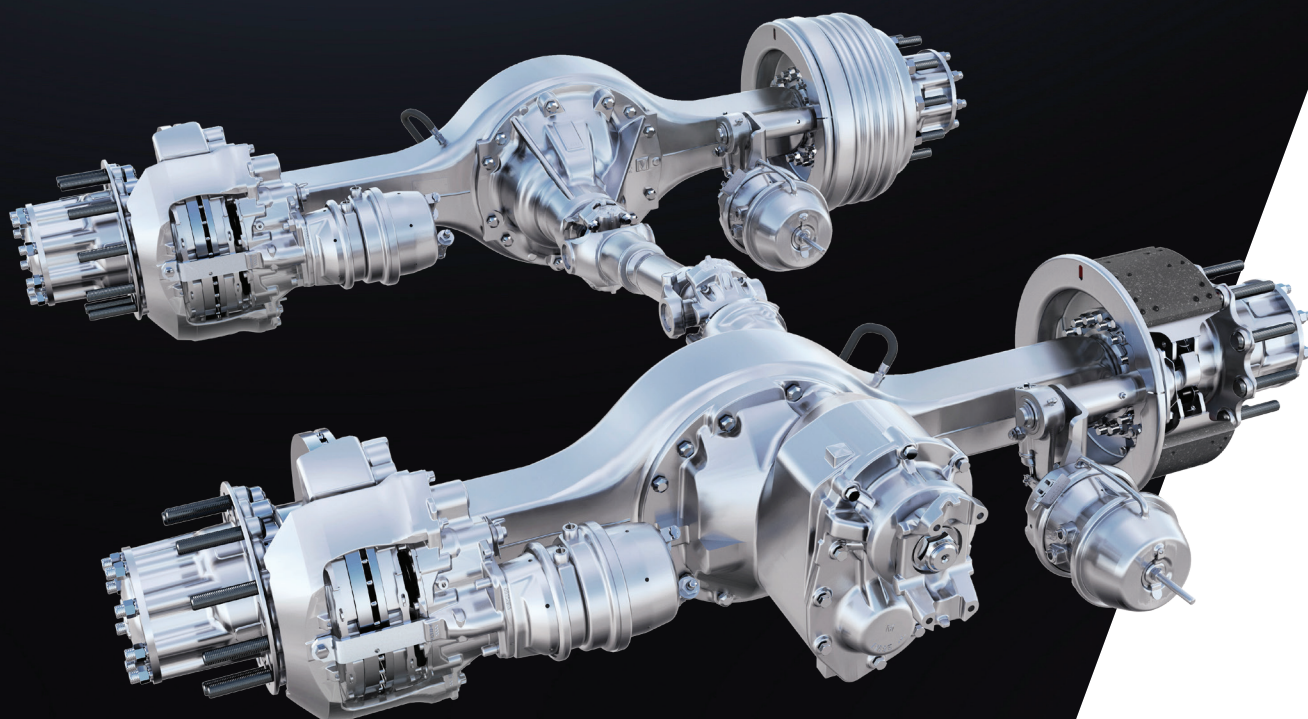


Meritor

**FOR
A WORLD
THAT'S
ALWAYS ON™**

EFFICIENCY. EVOLVED. AGAIN.

Even after more than 100 years of delivering axle innovations, Cummins-Meritor never stops. The latest enhancements to the 14X™ HE high efficiency tandem drive axle maximize performance and efficiency with the addition of the Meritor Lube Management System™ (MLMS) as a standard option on forward axles – delivering an incremental 0.3% axle efficiency gain by minimizing churning losses and reducing lube levels. The Dual MLMS – combined with proven fuel-efficient bearings, high-efficiency spiral bevel gearing and super-fast ratios – sets a new standard for performance and efficiency. We continue to lead with innovation that delivers bottom line savings to our customers.

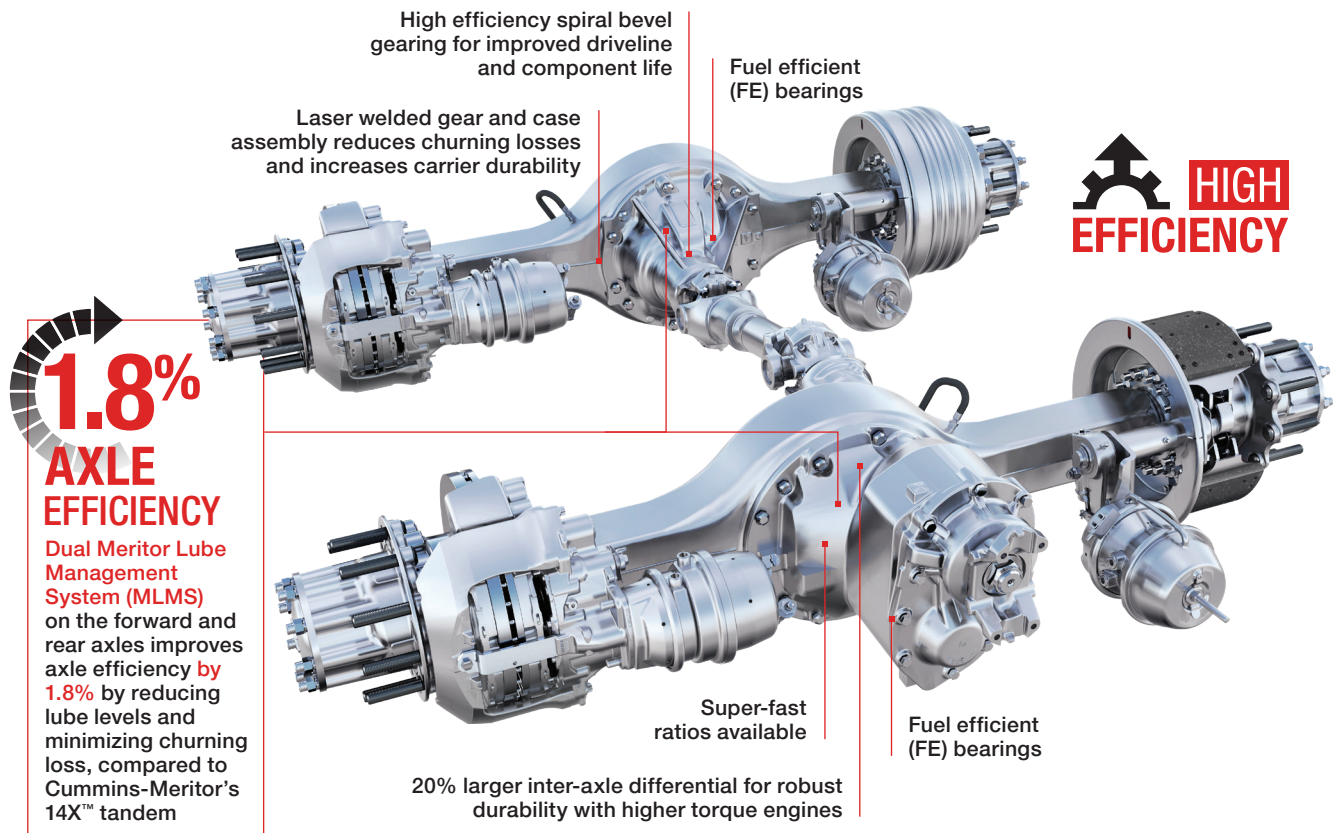

14X HE Specifications

Gross axle weight rating (GAWR)	40,000 lbs.
Gross combined weight rating (GCWR)	80,000 lbs.
Engine torque	Up to 1,850 ft. lbs.
Ratios	2.15, 2.28, 2.47, 2.64, 2.79, 2.85, 2.93, 3.08, 3.25, 3.36, 3.42, 3.55, 3.70, 3.90
Forward carrier lube volume	13.9 L
Rear carrier lube volume	9.3 L
Housing wall thickness	0.375 in. (9.5 mm), 0.437 in. (11 mm)
Housing track	Standard, DualTrac™
Differential lock	DCDL optional (forward only)



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

cummins.com

SP-1738
Bulletin 6446579 Produced in U.S.A. Rev. 1/23
©2023 Meritor, Inc.