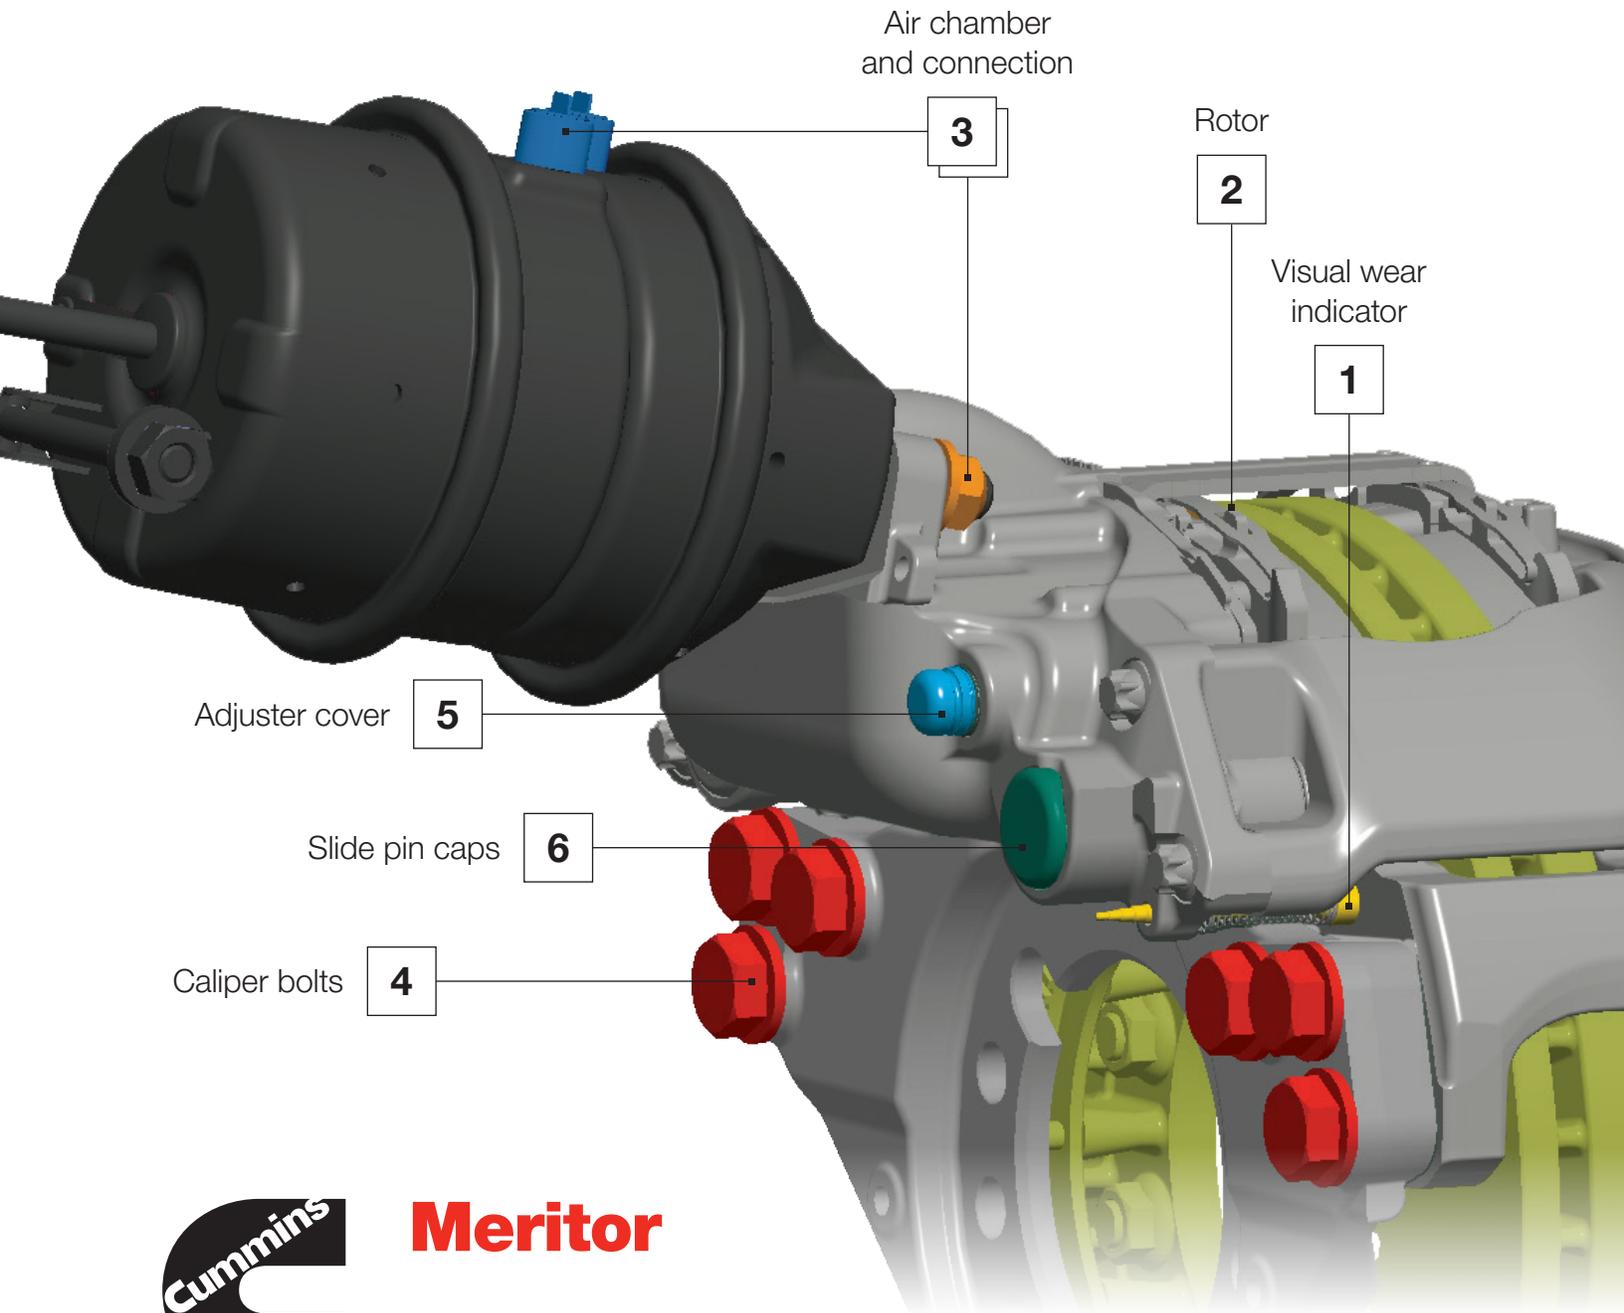

EX+™ L WHEELS-ON INSPECTION



Meritor

EX+ L WHEELS-ON INSPECTION

1

Visual wear indicator

If indicator shows more than 75% wear, perform wheels-off inspection. (Figure 1)

2

Rotor

Visually inspect rotor for signs of cracks, deep grooves, blue marks and heat checking.

3

Air chamber and connection

Inspect air chamber to verify that air chamber-to-caliper mounting nuts and air lines are securely fastened and not damaged.

4

Caliper bolts

Visually inspect caliper mounting bolts and ensure all 6 bolts are present and securely fastened.

5

Adjuster cover

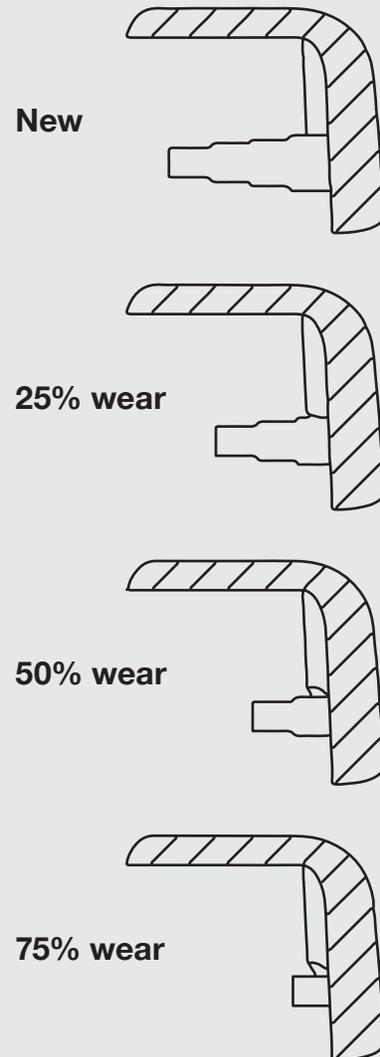
Visually inspect for caliper adjuster cover. If missing, replace with new cover.

6

Slide pin caps

Visually inspect slide pin caps. If missing, further inspection of slide pins and bushings is needed.

FIGURE 1



For more information, reference MM0467 at meritor.com/lod.



Cummins Inc.
Box 3005
Columbus, IN 47202-3005
U.S.A.

cummins.com

SP-18116
Bulletin 5676602 Produced in U.S.A. Rev. 6/23
©2023 Meritor, Inc.