



# FRAS-LE FRICTION MATERIAL



## VALUE 20K AF/520/GF

### PERFORMANCE ADVANTAGES


- Proven friction material for linehaul operations
- Provides both brake power and good resistance to fade
- Delivers proven stopping power at an exceptionally good price

# FRAS-LE FRICTION MATERIAL

## FEATURES AND BENEFITS

- Delivers a level of durability and friction stability not usually found in this price category
- Cadmium, lead, mercury, chromium and asbestos-free\*
- A medium-friction asbestos-free brake lining having a glass and polymer matrix base reinforced by a custom fiber blend
- Meets FMVSS 121 brake standards

### Typical Inertia Dynamometer Plot Test Parameters FMVSS 121 Brake Standard\*\*

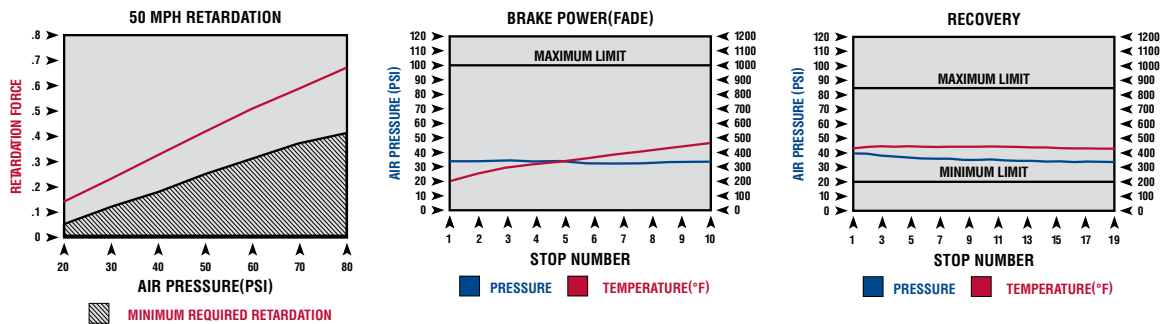

Brake: 16 1/2" x 7"  
 Meritor® S-Cam  
 Axle Load: 20,000 lb  
 AL Factor: 165  
 Normal Friction: .462 G  
 Hot Friction: .450 F

### Product Profile:

Freight Weight: Low, Medium

Terrain: Flat, Moderate

Applications



The application images are for illustrative purposes only. Package contents vary according to the application. Technical specifications are subject to change without prior notice.

\* May be present as residual

\*\* Test results are for reference only and are based on the results of a single test. Test results may vary from batch to batch, without jeopardizing the product's performance.



Meritor Heavy Vehicle Systems, LLC

7975 Dixie Highway  
 Florence, Kentucky 41042 USA

888-725-9355  
 meritor.com



FRAS-LE NORTH AMERICA, INC.

22260 Haggerty Road, Suite 365  
 Northville, MI 48167 USA

248-735-4900 Main  
 248-735-4901 Fax

MERITOR IS THE EXCLUSIVE DISTRIBUTOR OF FRAS-LE HEAVY-DUTY LINING IN NORTH AMERICA.

Revised 09-12 SP-0711 (47865/11900) ©2012 Meritor, Inc. Litho in USA