


# MERITOR® EG2 GG VALUE 23K FRICTION MATERIAL



**MERITOR®**

## **IDEAS DRIVING RESULTS**

**PROVEN STOPPING POWER.  
OUTSTANDING OVERALL VALUE.**

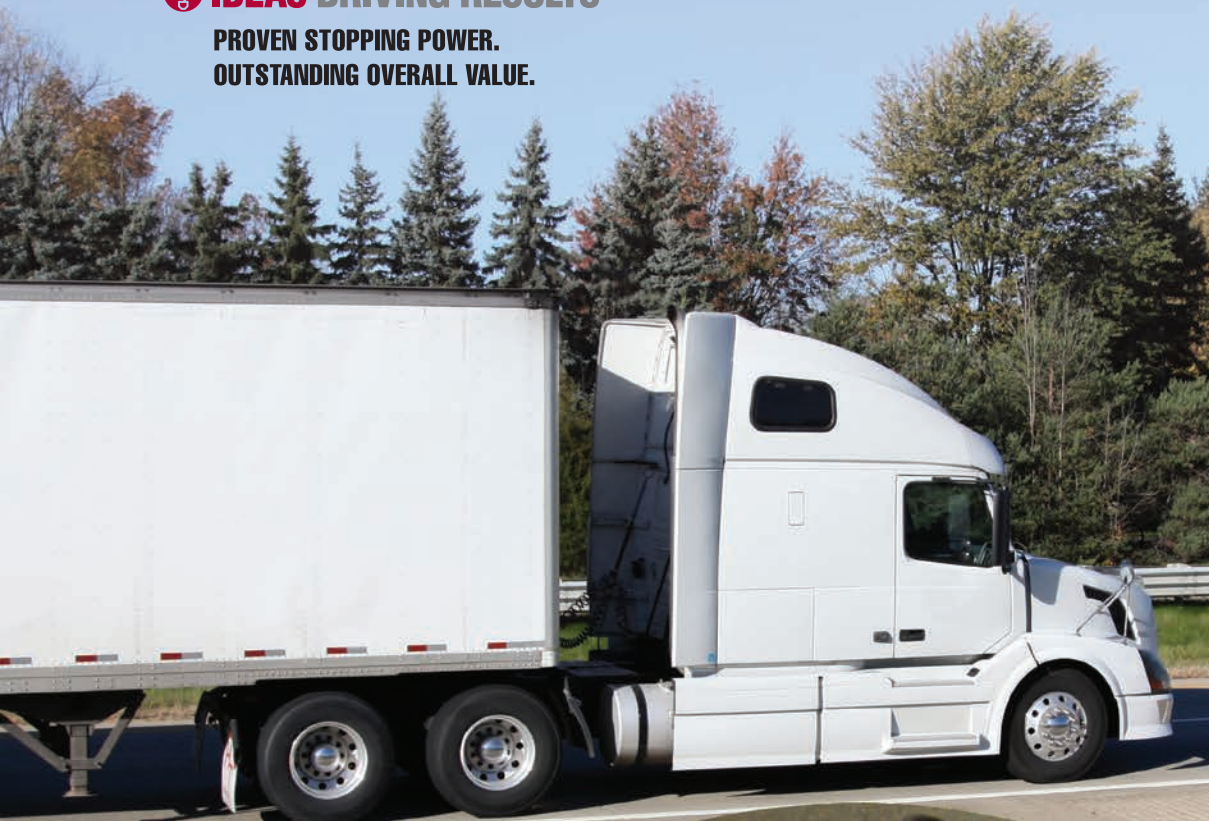


EG2 is a proven friction material for linehaul operations, providing both brake power and good resistance to fade. It delivers proven stopping power at an exceptionally good price.

## Features And Benefits

- Delivers a level of durability and friction stability not usually found in this price category
- EG2 is a medium-friction asbestos-free brake lining having a glass and polymer matrix base reinforced by a custom fiber blend
- Meets FMVSS 121 brake standards

## Typical Inertia Dynamometer Plot Test Parameters FMVSS 121 Brake Standard\*

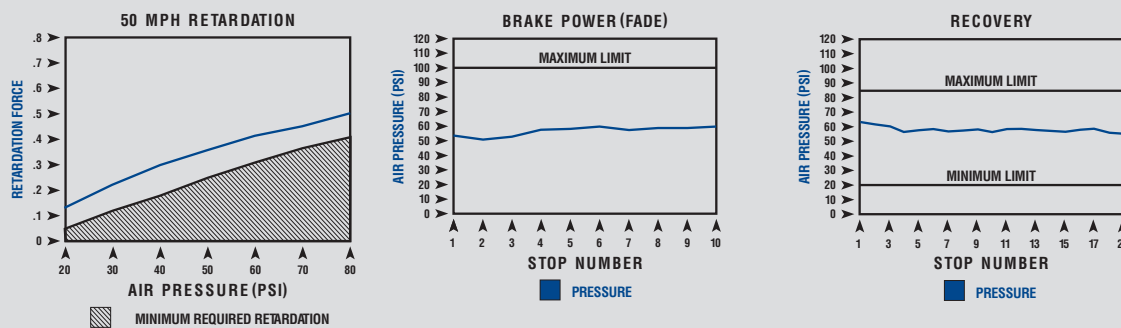



Brake: 16 1/2" x 7"  
Meritor® S-Cam  
Axle Load: 23,000 lb  
AL Factor: 165  
Normal Friction: .453 G  
Hot Friction: .485 G

\* Test results are for reference only and are based on the results of a single test. Test results may vary from batch to batch, without jeopardizing the product's performance.

## Product Profile

Freight Weight: Low, Medium

Terrain: Flat, Moderate

Applications		
Tandem Axle Tractor/Trailer 	Container Chassis 	Flat Bed Trailer 

The application images are for illustrative purposes only. Package contents vary according to the application. Technical specifications are subject to change without prior notice.

Vehicle models, brands and names depicted herein are the property of their respective owners, and are not in any way associated with Meritor, Inc., or its affiliates.



Meritor Heavy Vehicle Systems, LLC  
7975 Dixie Highway  
Florence, Kentucky 41042 USA

888-725-9355 U.S.  
800-387-3889 Canada  
MeritorPartsOnline.com  
meritor.com

©2013 Meritor, Inc.  
Litho in USA, SP-1050  
Revised 09-13 (47865/11900)