




FRAS-LE FRICTION MATERIAL

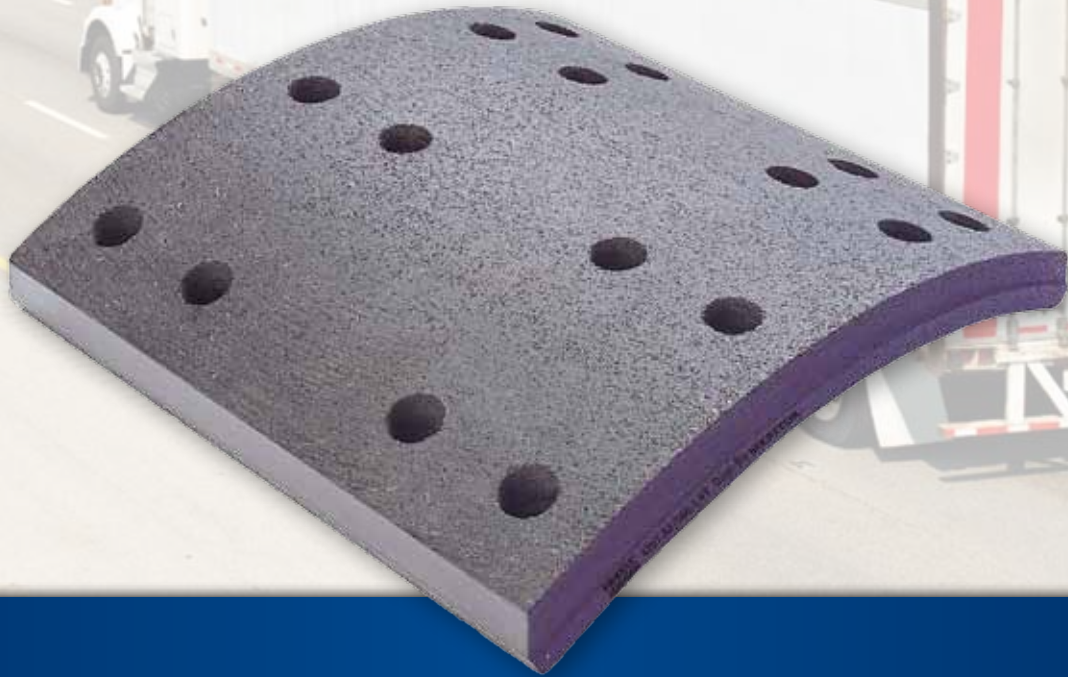

STANDARD 20K AF/540-1/FF

PERFORMANCE ADVANTAGES


- Outperforms other brake linings in its price category for drum compatibility and wear life
- Recognized for reliability and durability
- Delivers impressive stopping power at an exceptionally good price
- Provides both brake power and good resistance to fade

FRAS-LE FRICTION MATERIAL

FEATURES AND BENEFITS

- Delivers a level of durability and friction stability not usually found in this price category
- Recognized as a dependable and versatile performer
- Cadmium, lead, mercury, chromium and asbestos-free*
- A medium-friction asbestos-free brake lining having a glass and polymer matrix base reinforced by a custom fiber blend
- Exceeds FMVSS 121 brake standards

Typical Inertia Dynamometer Plot Test Parameters FMVSS 121 Brake Standard**

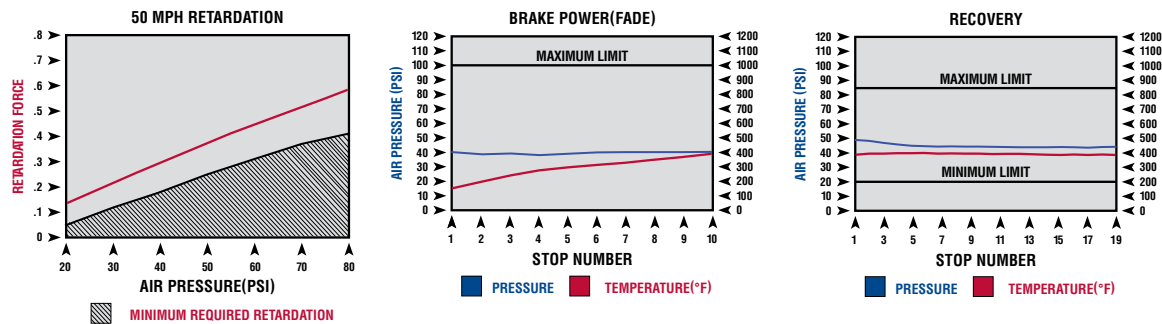

Brake: 16 1/2" x 7"
 Meritor® S-Cam
 Axle Load: 20,000 lb
 AL Factor: 165
 Normal Friction: .369 F
 Hot Friction: .387 F

Product Profile:

Freight Weight: Low, Medium, Heavy

Terrain: Flat, Moderate

Applications

Single Axle Tractor/Trailer 	Tandem Axle Tractor/Trailer 	Flat Bed Trailer 	Double Trailer 	Moving Van - Low Profile
School Bus 	Beverage 	Container Chassis 	Car Hauler 	

The application images are for illustrative purposes only. Package contents vary according to the application. Technical specifications are subject to change without prior notice.

* May be present as residual

** Test results are for reference only and are based on the results of a single test. Test results may vary from batch to batch, without jeopardizing the product's performance.



FRAS-LE NORTH AMERICA, INC.

22260 Haggerty Road, Suite 365
 Northville, MI 48167 USA

248-735-4900 Main
 248-735-4901 Fax

Meritor Heavy Vehicle Systems, LLC

7975 Dixie Highway
 Florence, Kentucky 41042 USA

888-725-9355
 meritor.com