

MERITOR® R403 SEVERE-DUTY FRICTION MATERIAL



MERITOR




IDEAS DRIVING RESULTS

SUPERIOR FRICTION FOR
INCREASED UPTIME.



R403 is the Meritor 26,000 lb. gross axle weight rated (GAWR) brake lining for severe-duty brake applications. It has superior performance, fade resistance and dependable stopping capability in heavy load vocations. R403 is recommended for construction, refuse and other severe service applications, on- or off-highway – under various terrain conditions. It has a proven track record of recognized durability.

R403 Technical Data – Typical Test Results

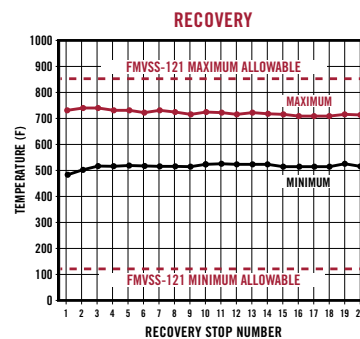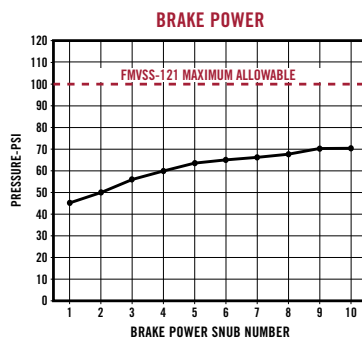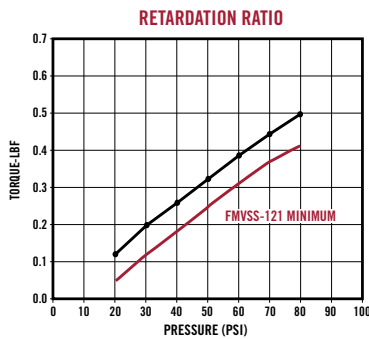







Brake: 16 1/2" x 7"
 Meritor® Q Plus™ Heavy-Duty
 Axle Load: 26,000 lb
 AL Factor: 180
 Normal Friction: .54 G
 Hot Friction: .51 G

Product Profile

Freight Weight: Medium, Heavy

Terrain: Flat, Moderate, Mountainous, Off-Road

Applications

Tri-Axle Dump Trailer 	Logging 	Refuse 	Mixer 	Dump 
Fire Truck 				

The application images are for illustrative purposes only. Package contents vary according to the application. Technical specifications are subject to change without prior notice.



Meritor Heavy Vehicle Systems, LLC
 7975 Dixie Highway
 Florence, Kentucky 41042 USA

888-725-9355 U.S.
 800-387-3889 Canada
 MeritorPartsOnline.com
 meritor.com

©2013 Meritor, Inc.
 Litho in USA, SP-9962
 Revised 05-13 (47865/11900)